



EMGE®

ALIS
Projector



LED TECHNOLOGY INCLUDED



INVENTRONICS

SAMSUNG

NICHIA

OSRAM

MW
MEAN WELL


Teknik Özellikler / Technical Specifications

Gövde	Alüminyum Enjeksiyon Gövde
Body	Aluminium Injection Body
Montaj	Sıvaüstü
Mounting	Surface
Renk	Ral7035
Color	Ral7035
Cam	4mm Temperli Cam
Glass	4mm Tempered Glass
LED Ömrü	(L80B10) >72.000 Saat
LED Lifetime	>72.000 Hours
Sürücü	>50000 Saat Ömür, EMGE Sürücü
Driver	Lifetime >50000, EMGE driver
Giriş Voltajı	85-265 V , 50-60 Hz
Input Voltage	85-265 V , 50-60 Hz
Optik	18° - 40° - 60° - 90° - 140°/60° Asimetrik
Optic	18° - 40° - 60° - 90° - 140°/60° Asymmetric
Led	Yüksek Etkinlik Faktörüne Sahip Mid-Power
Led	High Efficiency Mid-Power




Tip Type	Güç Power	Renk Sıcaklığı Color Temperature	Işık Akısı Luminous Flux	CRI	Ağırlık Weight (kg)
LEDALI	25W	3000K-4000K-5000K-6500K	2662 LM	>80	3,2
LEDALI	35W	3000K-4000K-5000K-6500K	3727 LM	>80	3,2

Luminous Intensity Distribution Curve

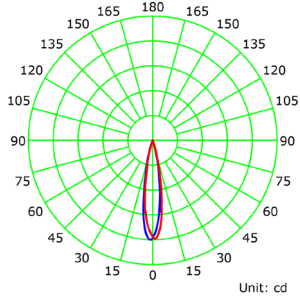


— C0-C180 — C90-C270

Luminous Intensity Distribution Curve

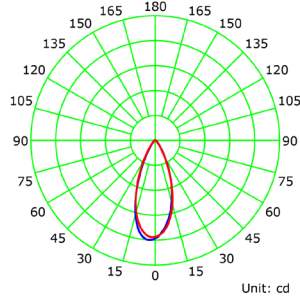


— C0-C180 — C90-C270

Luminous Intensity Distribution Curve

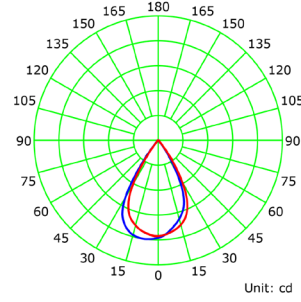


— C0-C180 — C90-C270

Luminous Intensity Distribution Curve

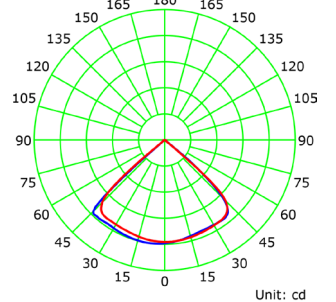

— C0-C180 — C90-C270


BAĞLANTI OPSİYONLARI



MAFSAL BAĞLANTI



U KONSOL BAĞLANTI




BAHÇE KAZIĞI + MAFSAL




BAHÇE KAZIĞI + KONSOL


MAFSAL BAĞLANTI

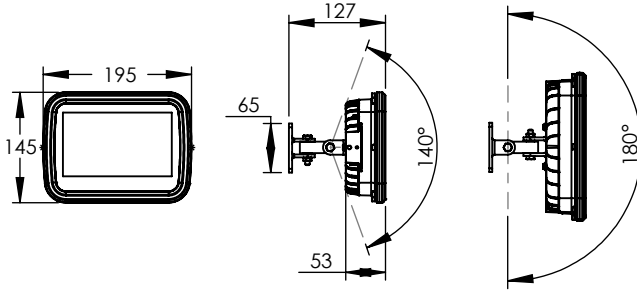

BAHÇE KAZIĞI + MAFSAL

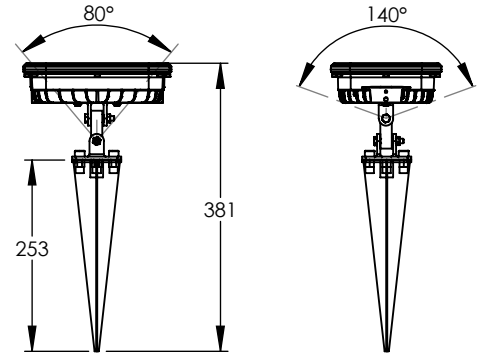

U KONSOL BAĞLANTI

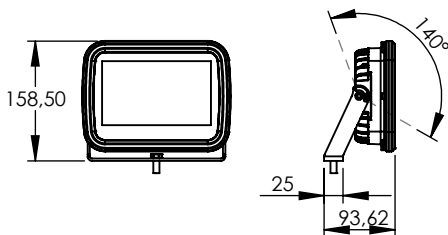

BAHÇE KAZIĞI + KONSOL

