



EMGE®

AYDA
Led Line



LED TECHNOLOGY INCLUDED




Teknik Özellikler / Technical Specifications

Gövde	Alüminyum Ekstrüzyon Gövde
Body	Aluminum Injection Body
Montaj	Sivaüstü
Mounting	Surface
Renk	Standart (Eloksal)
Color	Standart (Anodized)
Difüzör	Opal Homojen Işık Dağılımı
Diffuser	Opal Homogeneous Light Distribution
LED Ömrü	(L80B10) >72.000 Saat
LED Lifetime	>72.000 Hours
Sürücü	>50000 Saat Ömür, Verimlilik >92, PFC >95
Driver	Lifetime >50000, Efficiency >92, PFC >95
Giriş Voltajı	24 V / 85-265 V , 50-60 Hz
Input Voltage	24 V / 85-265 V , 50-60 Hz
Led	Yüksek Etkinlik Faktörüne Sahip Mid-Power
Led	High Efficiency Mid-Power



Tip Type	Güç Power	Renk Sıcaklığı Color Temperature	Işık Akısı Luminous Flux	CRI	Ağırlık Weight (kg)
LEDAYD	3W	3000K-4000K-5000K-6500K	120 LM	>80	0,13
LEDAYD	6W	3000K-4000K-5000K-6500K	240 LM	>80	0,2
LEDAYD	9W	3000K-4000K-5000K-6500K	360 LM	>80	0,3
LEDAYD	12W	3000K-4000K-5000K-6500K	480 LM	>80	0,3
LEDAYD	15W	3000K-4000K-5000K-6500K	600 LM	>80	0,4

Luminous Intensity Distribution Curve

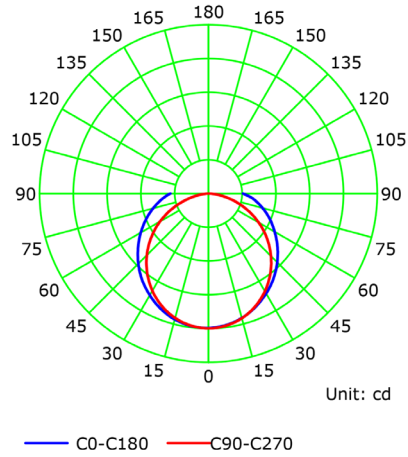

Güç Power	Ölçüler / Dimensions (mm)		
	a	b	c
3W	365	19	18
6W	615	19	18
9W	875	19	18
12W	1135	19	18
15W	1395	19	18

