



EMGE®

HERA Street Lighting



**155
LM/W**



LED TECHNOLOGY INCLUDED

INVENTRONICS

SAMSUNG

NICHIA

OSRAM

MW
MEAN WELL


Teknik Özellikler / Technical Specifications

Gövde	Alüminyum Enjeksiyon Gövde, Ön Kapak UV Işınlara Ve Isıya Dayanıklı, Cam Elyaf Takviyeli Polikarbon
Body	Body Aluminum injection, Front Cover UV Protection And Heat Resistant Fiber Reinforced Polycarbonate
Montaj	Direğe montaj
Mounting	Pole mounting
Renk	Standart (Beyaz)
Color	Standart (White)
Cam	4mm Temperli Cam
Glass	4mm Tempered Glass
LED Ömrü	(L80B10) >72.000 Saat
LED Lifetime	>72.000 Hours
Sürücü	>100000 Saat Ömür, Verimlilik >92, PFC >95
Driver	Lifetime >100000, Efficiency >92, PFC >95
Giriş Voltajı	140-305 V , 50-60 Hz
Input Voltage	140-305 V , 50-60 Hz
Optik	18° - 40° - 60° - 90° - 140°/60° Asimetrik
Optic	18° - 40° - 60° - 90° - 140°/60° Asymmetric
Led	Yüksek Etkinlik Faktörüne Sahip High-Power
Led	High Efficiency High-Power



Tip Type	Güç Power	Renk Sıcaklığı Color Temperature	Işık Akısı Luminous Flux		CRI	Ağırlık Weight (kg)
			Low	High		
LEDHER	50W	3000K-4000K-5000K-6500K-YEŞİL	5728 LM	6500	>70	5,6
LEDHER	75W	3000K-4000K-5000K-6500K-YEŞİL	8592 LM	9750	>70	5,6
LEDHER	100W	3000K-4000K-5000K-6500K-YEŞİL	11456 LM	13000	>70	5,7
LEDHER	120W	3000K-4000K-5000K-6500K-YEŞİL	13747 LM	15600	>70	5,7
LEDHER	150W	3000K-4000K-5000K-6500K-YEŞİL	17184 LM	19500	>70	5,8

Luminous Intensity Distribution Curve

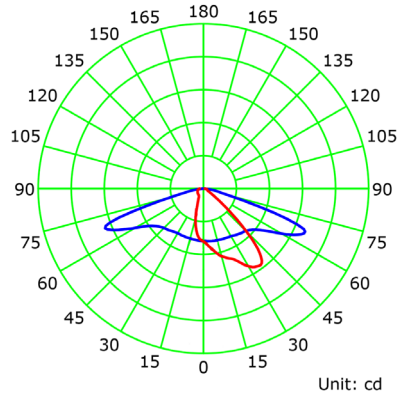

— C0-C180 — C90-C270

